

HNF-M Heat Shrink Marker Sleeve

Description HNF-M marker sleeve is a flattened, heat-shrinkable tubing designed for wire and cable harness identification. It can also be used for applications where limited fire hazard characteristics are necessary. The zero halogen material coupled with low smoke and low toxic fume emissions make this product perfectly used in enclosed spaces such as mass transit, marine and industrial installations.

Standard meets NF F16-101, SAE-AS 81531, MIL-STD-202F/Method 215J, RoHS etc

Features

Material	The sleeving shall be fabricated from irradiated, thermally stabilized and flame retarded modified polyolefin compound containing no halogens or cadmium in the formulation.
Application range	Industrial environment ; Rail & mass transit; Aerospace & defense; Marine;
Operating temperature range	-40---+125℃
Minimum recovery temperature	+85℃
Maximum storage temperature	+50℃
Shrink ratio	2:1, 3:1
Color	White, Yellow, other color is available if ordered
Printing mode	Single sided printing and Double sided printing formats available
Supplied mode	Either Continuous type or Ladder format type is available
Recommended Printers	Thermal transfer printer
Recommended Ribbons	N85 resin ribbon, Black, 100mm(width)*300m(length)

Product dimensions

Shrink ratio-2X

Part Number	As Supplied (mm)			After Recovery(mm)	
	ID(D)	Flatten Width(W)	Double Wall Thickness	ID(d)	Single Wall Thickness
HNF-M-2X-1.6-	2.00±0.20	3.7±0.3	0.48±0.10	≤0.79	0.45±0.06
HNF-M-2X-2.4-	2.79±0.20	5.0±0.3	0.48±0.10	≤1.18	0.49±0.06
HNF-M-2X-3.2-	3.64±0.23	6.3±0.4	0.48±0.10	≤1.59	0.51±0.06
HNF-M-2X-4.8-	5.26±0.25	8.9±0.4	0.49±0.10	≤2.36	0.54±0.06
HNF-M-2X-6.4-	6.92±0.28	11.5±0.4	0.50±0.10	≤3.18	0.56±0.06
HNF-M-2X-9.5-	10.2±0.32	16.7±0.5	0.51±0.11	≤4.75	0.59±0.06
HNF-M-2X-12.7	13.5±0.36	21.8±0.6	0.52±0.11	≤6.35	0.60±0.07
HNF-M-2X-19-	20.1±0.40	32.2±0.6	0.53±0.11	≤9.53	0.62±0.07
HNF-M-2X-25-	26.7±0.45	42.5±0.7	0.55±0.12	≤12.7	0.63±0.07
HNF-M-2X-38-	39.8±0.51	63.2±0.8	0.57±0.12	≤19.1	0.64±0.07
HNF-M-2X-51-	53.0±0.56	83.9±0.9	0.58±0.13	≤25.4	0.64±0.08
HNF-M-2X-76-	79.4±0.56	125.3±1.0	0.59±0.13	≤38.1	0.64±0.09

Shrink ratio-3X

Part Number	As Supplied (mm)			After Recovery(mm)	
	ID(D)	Flatten Width(W)	Double Wall Thickness	ID(d)	Single Wall Thickness
HNF-M-3X-1.6-	2.00±0.20	3.7±0.3	0.47±0.10	≤0.53	0.52±0.06


HNF-M-3X-2.4-	2.79±0.20	5.0±0.3	0.47±0.10	≤0.79	0.57±0.06
HNF-M-3X-3.2-	3.64±0.23	6.3±0.4	0.48±0.10	≤1.06	0.61±0.06
HNF-M-3X-4.8-	5.26±0.25	8.9±0.4	0.49±0.10	≤1.59	0.67±0.06
HNF-M-3X-6.4-	6.92±0.28	11.5±0.4	0.50±0.10	≤2.36	0.71±0.06
HNF-M-3X-9.5-	10.2±0.32	16.7±0.5	0.52±0.11	≤3.18	0.77±0.06
HNF-M-3X-12.7	13.5±0.36	21.8±0.6	0.53±0.11	≤4.75	0.80±0.07
HNF-M-3X-19-	20.1±0.40	32.2±0.6	0.55±0.11	≤6.35	0.84±0.07
HNF-M-3X-25-	26.7±0.45	42.5±0.7	0.56±0.12	≤8.47	0.86±0.07
HNF-M-3X-38-	39.8±0.51	63.2±0.8	0.57±0.12	≤12.9	0.89±0.07
HNF-M-3X-51-	53.0±0.56	83.9±0.9	0.57±0.1	≤17.2	0.90±0.08
HNF-M-3X-76-	79.4±0.56	125.3±1.0	0.57±0.13	≤25.8	0.92±0.09

Package information

Ordering Size (HNF-M-2X/3X)	Ladder Format Type	Continuous Type	
	A&B-Small Box Packing (PCS/Box)	A-Paper reel Packing (m/reel)	B-Plastic reel Packing(m/reel)
Φ 1.6	2500	50	25
Φ 2.4	2500	50	25
Φ 3.2	2000	100	25
Φ 4.8	2000	100	25
Φ 6.4	2000	100	25
Φ 9.5	1000	100	25
Φ 12.7	1000	100	25
Φ 19	500	100	25
Φ 25	500	100	25
Φ 38	500	50	25
Φ 51	250	50	25
Φ 76	250	50	—

Part Numbering System

HNF-M-3X-4.8-50-2.0K-Y 0 P2 W

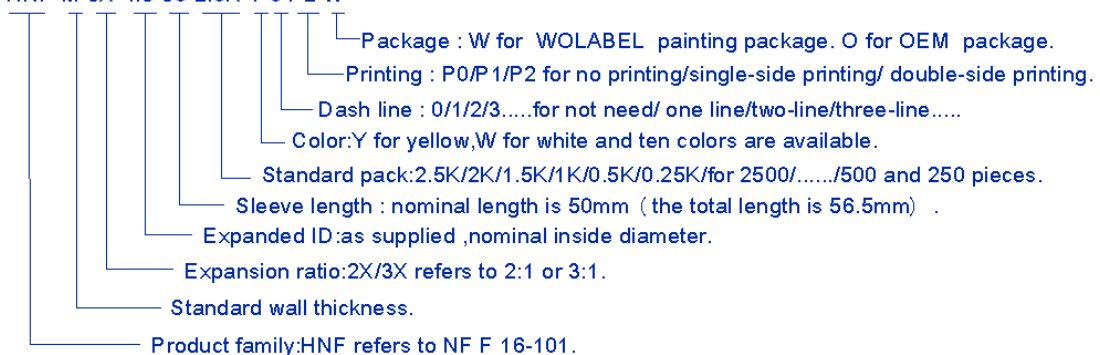

Color code	BL	Br	R	Or	Y	G	Blu	V	Gr	W
Color	Black	Brown	Red	Orange	Yellow	Green	Blue	Violet	Grey	White

Note: Yellow and white are standard, other color is available if ordered.

